

43" All-In-One HD Commercial display with BrightSign®|built-in

M43SDPB



Reliable All-In-One Commercial LCD LED Digital Sign Solution

Engaging audiences has never been easier - introducing the M43SDPB all-in-one digital signage solution with BrightSign built-in. This highly reliable display offers a cost-effective solution ideal for restaurants, retail, entertainment, public spaces, and more. The robust full HD 1080p display is powered by BrightSign, the industry leader in digital signage media players and software. The integrated solid-state BrightSign HD222 player delivers flawless Full HD 1080p60 single video decoding, HTML support, networked content playback as well as an abundant set of features such as interactivity via the GPIO port, remote snapshot, live text, media feeds, multi-zone etc. Effortlessly create presentations with BrightSign's free BrightAuthor software and take advantage of the 99% uptime.



KEY FEATURES

**BrightSign built-in Performance**

Powered by an integrated robust and feature rich BrightSign HD222 player, there is no need to add an external PC and cables. This provides a clutter free environment with lower equipment and maintenance cost.

**IP Streaming**

HD Video IP streaming is available on all BrightSign built-in displays. Buffer media streams for smooth playback. Play streaming media in HTML5 assets or in BrightAuthor's video, audio or MJPEG stream states.

**Free BrightAuthor Management Software**

BrightAuthor is a PC software application for BrightSign that makes creating, publishing and managing interactive BrightSign presentations simple and dependable.

**Industrial Ultra Slim Design**


A sleek, stylish yet rugged design, with simple installation and maintenance, offers a perfect all-in-one solution for today's marketplace.

**UDP Controls**

Supported via the Ethernet port for video wall synchronization, mobile device interactivity, and messaging between BrightSign and third-party devices such as projectors, lighting, etc. and can be integrated with other show controllers.

43" All-In-One HD Commercial display with BrightSign®|built-in

M43SDPB

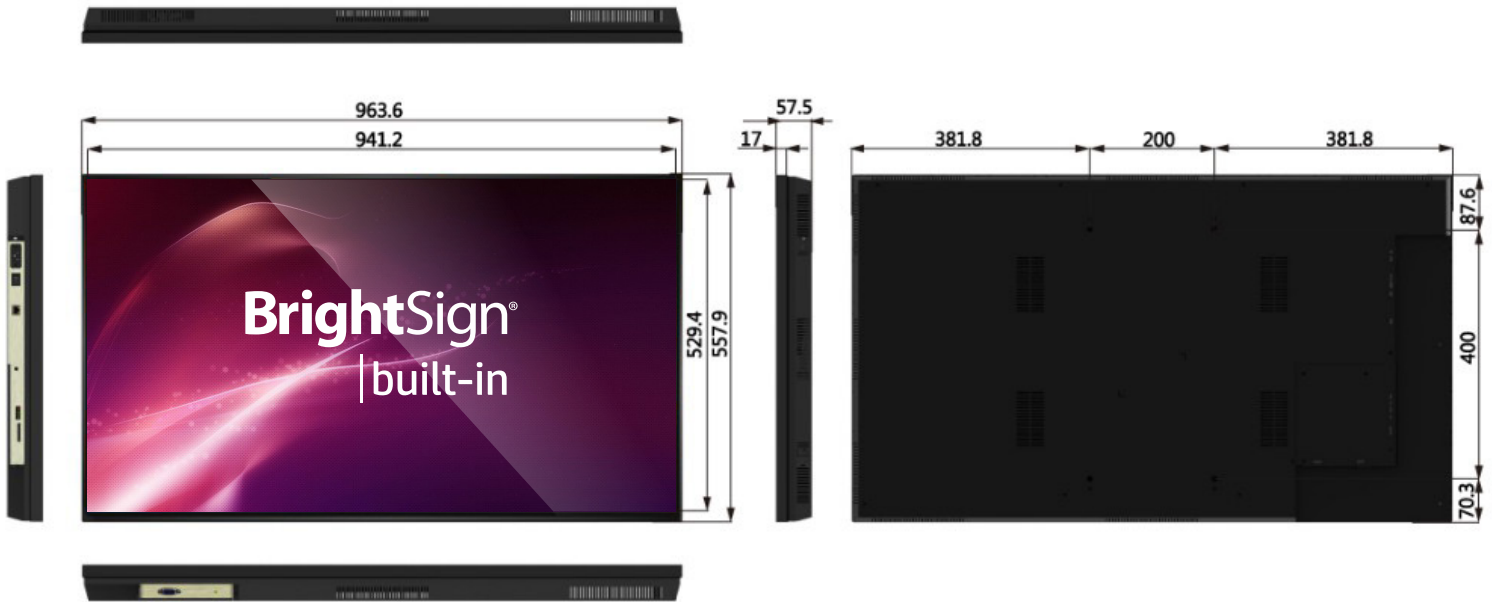

Specifications

PANEL	Type	43" LCD LED Backlight
	Display Area (mm)	941.2(H) x 529.4(H)
	Resolution	1920 x 1080p
	Brightness	450 cd/m <sup>2</sup>
	Contrast Ratio	1100:1
	Viewing Angle	178° x 178°
	Aspect Ratio	16:9
	Panel Life	30,000 hours
AUDIO OUTPUT	Speakers	(2) 2watt 4Ω
PLAYER	Integrated Player	Brightsign HD222

CONNECTOR	Control	GPIO
	SD Slot	SDHC and SDXC
	LAN	RJ45 (10/100)
	Audio Out	3.5mm Stereo Mini Jack
POWER	Voltage Consumption	AC 100-240V (50/60Hz) 80W
OPERATING CONDITIONS	Temperature	32-122°F (0-50°C)
	Humidity	10-80% (non-condensing)
DIMENSIONS	Physical	37.93" x 21.96" x 2.26" in.
	Packaging	42.84" x 27.10" x 8.36"
WEIGHT	Net	33.06lbs. / 15kg
	Gross	37.47lbs. / 17kg
MOUNT	VESA	200 x 400